



**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)



REC'D	18 DEC 2003
WIPO	PCT

Rec'd PCT/PTO 10 MAY 2005  
PCT/GB 2003 / 004861



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

**10/534494**

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

11 December 2003

**BEST AVAILABLE COPY**

Patents Form 1/77

THE PATENT OFFICE

The  
Patent  
OfficePatents Act 1977  
(Rule 16)

11 NOV 2002

RECEIVED BY FAX

fee

1/77

**Request for grant of a patent***(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference IP/P7216

2. Patent application number 0226243.4  
*(The Patent Office will fill in this part)* 11 NOV 20023. Full name, address and postcode of the or of each applicant *(underline all surnames)*  
QINETIQ LIMITED  
Registered Office 85 Buckingham Gate  
London SW1E 6PD  
United Kingdom  
8183873008  
Patents ADP number *(if you know it)*  
If the applicant is a corporate body, give the country/state of its incorporation GB4. Title of the invention  
PROXIMITY SENSOR5. Name of your agent *(if you have one)*  
PHILIP DAVIES 'et al'  
"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*  
QINETIQ LIMITED  
IP Formalities  
A4 Bldg  
Cody Technology Park  
Ively Road  
Farnborough  
Hants GU14 0LX United Kingdom  
Patents ADP number *(if you know it)*  
81838730056. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number  
Country Priority application number *(if you know it)* Date of filing *(day / month / year)*7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application  
Number or earlier application Date of filing *(day / month / year)*8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:*  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))  
YES (b)

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	0
Description	12
Claim(s)	3
Abstract	1
Drawing(s)	2 0.9" 2

10. If you are also filing any of the following, state how many against each item.

Priority documents	0
Translations of priority documents	0
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	3
Request for preliminary examination and search (Patents Form 9/77)	1
Request for substantive examination (Patents Form 10/77)	0
Any other documents (please specify)	0

11. I / We request the grant of a patent on the basis of this application.

Signature

PHILIP DAVIES

R. Davis

Date

7.11.02

12. Name and daytime telephone number of person to contact in the United Kingdom

Linda Bruckshaw 01252 392722

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent of the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- a) If you need help to fill in this form or have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have attached 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

1/2

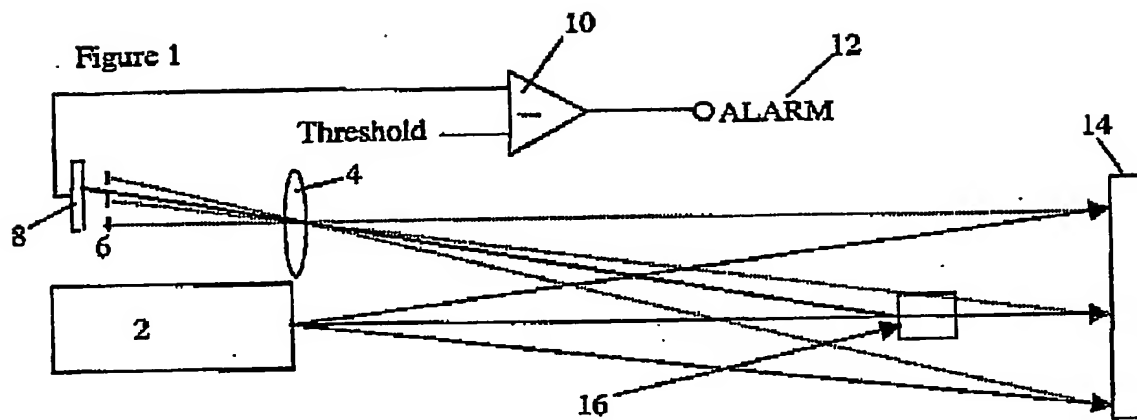


Figure 2


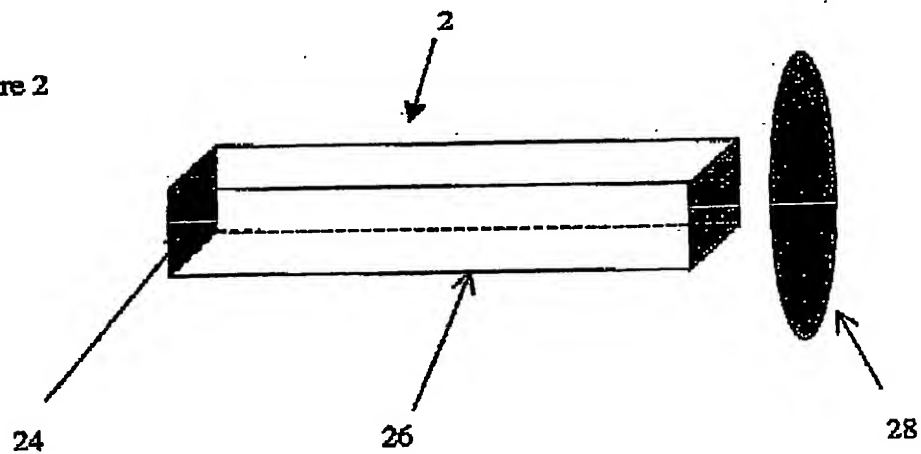


Figure 3

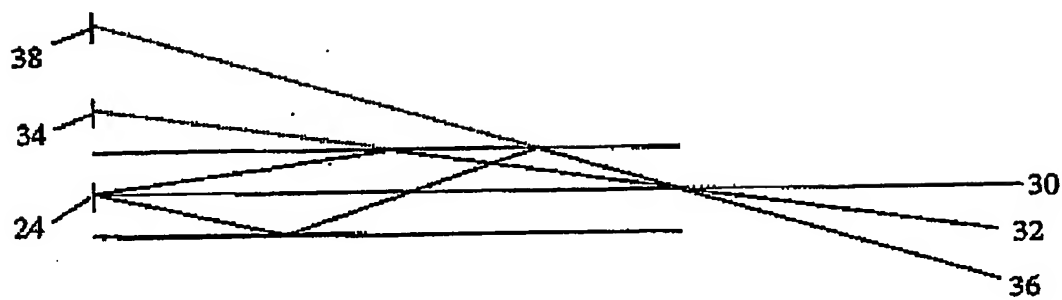

2/2

Figure 4a

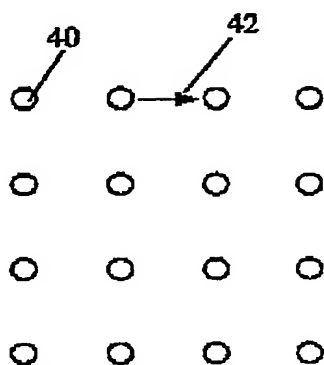


Figure 4b

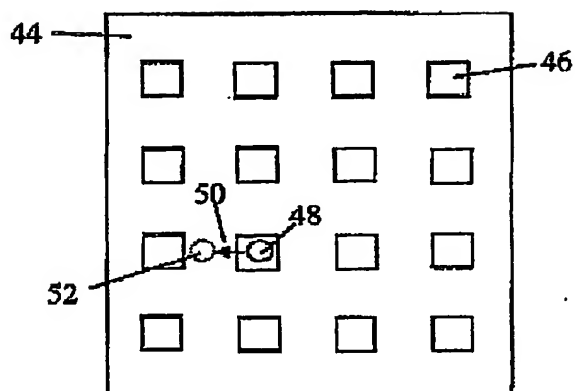


Figure 5a

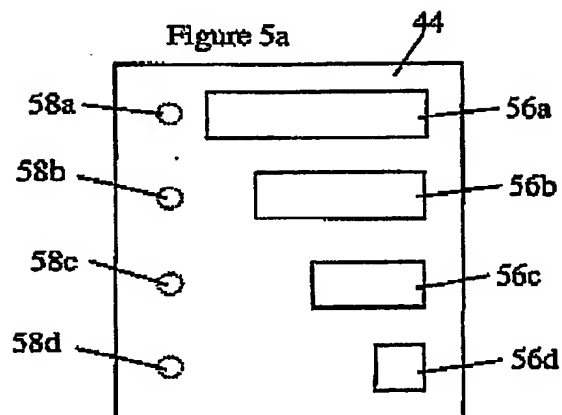


Figure 5b

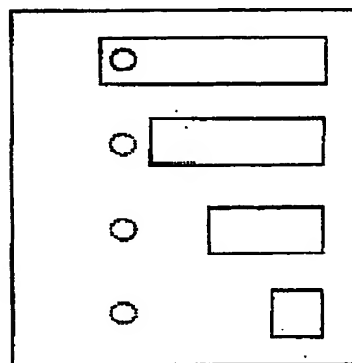


Figure 5c

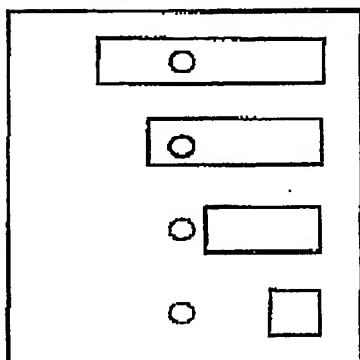


Figure 5d


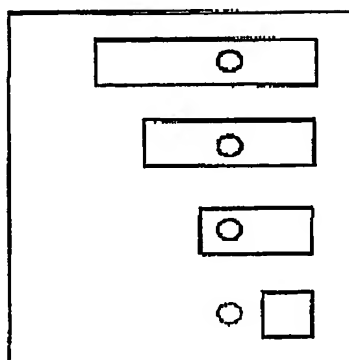


Figure 5e

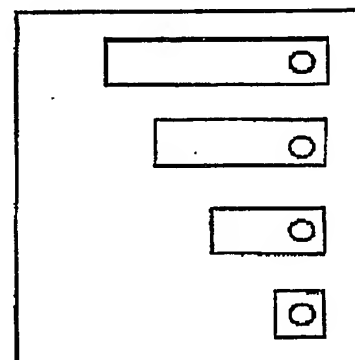

DUPLICATE

## 1

## Proximity Sensor

The present invention relates to a proximity sensor in particular to a proximity sensor for determining when a certain minimum distance to a target has been reached.

5

According to the present invention there is provided a proximity sensor comprising an illumination means for illuminating a scene with an array of spots of light, a detector arranged to receive light reflected from the scene and a mask, located in the optical path of light from the scene to the detector, the mask having transmissive portions and non-transmissive portions and being arranged, together with the illumination means and detector such that, in use, light reflected from a target from within a first range of distances from the sensor is transmitted through the mask to the detector and light from a second range of distances is not transmitted through the mask.

10

15 The illumination means projects an array of spots towards a scene and the detector in effect looks towards the scene through the mask. The detector can in effect only see part of the scene. The position at which the projected spots will appear in the scene depends upon how close a target is to the scene. Therefore with a careful choice of mask and alignment of illumination means and detector the detector can be arranged so that it sees the spots if the target is within a first certain range of distances but can not see the spots if the target is within a second range of distances.

20

Whether or not the detector can see the spots therefore can be used to give an indication of whether a target is in the first range of distances or second range of distances.

25

The mask may be arranged such that reflected or scattered light is transmitted to the detector if the target is within a predetermined distance of the sensor and reflected light is not transmitted if the target is outside of that predetermined distance. In this case the sensor could be a simple proximity alarm. A sudden increase in detected light would indicate that a target had come within the predetermined distance of the detector or a sudden decrease could indicate that a target had moved further away relative to the sensor. A sudden change in intensity could therefore be used to trigger an appropriate alarm.

30

Alternatively the mask could be adapted to transmit light reflected from a target more than a predetermined distance away and not transmit light from within the predetermined distance.

5

Preferably the illumination means illuminates the scene with spots of infrared light. Spots of infrared light will not be visibly detected which could be useful for some applications. Also the illumination means is preferably modulated at a predetermined frequency and a filter applied to the detector output at the predetermined frequency.

10 Modulating the light source and filtering the detected signal reduces the effects of ambient lighting conditions. Additionally or alternatively the detector could be adapted to receive ambient light from the scene and the effects of the ambient light could be compensated for.

15 The mask may be adapted to define a plurality of ranges of distance from the sensor and transmit a different amount of light from a target in each distance range. For instance the mask could be substantially non transmitting and have a plurality of transmissive windows. The mask could be adapted such that when a target is located above a certain upper limit distance no reflected light is transmitted through the mask.

20 When an object is introduced which is closer than the upper distance limit but which is further away than a lower distance limit the windows in the mask could be arranged so as to let light from one or more spots reach the detector. If an object was introduced below the lower distance limit the windows in the mask could be arranged to allow light from a greater number of spots to reach the detector. Thus the detector  
25 could experience three intensity levels depending upon the location of a target in the scene.

The sensor could be arranged to have a plurality of zones of distance and determine within which zone a target is located. The sensor could then provide a control signal  
30 or alarm as appropriate. For instance in application as a proximity sensor for a reversing vehicle the rate of sounding an audible alarm could be increased as the target and sensor get closer.

In order to improve discrimination of the various ranges of distance the illumination means could be adapted to project a plurality of spots at different modulated frequencies and the mask be adapted such that at each range of distance a different modulated frequency is transmitted to the detector. In other words each distinct range boundary could have a particular frequency modulation associated with it. Detection of a spot at a particular frequency would then indicate which range zone the target was in.

Conveniently the illumination means comprises a light source arranged to illuminate part of the input face of a light guide, the light guide comprising a tube having substantially reflective sides and being arranged together with projection optics so as to project an array of distinct images of the light source towards the scene.

The light guide in effect operates as a kaleidoscope. Light from the source is reflected from the sides of the tube and can undergo a number of reflection paths within the tube. The result is that multiple images of the light source are produced and projected onto the scene. Thus the scene is illuminated with an array of images of the light source. The source is preferably a simple light emitting diode and the scene is therefore illuminated with an array of spots of light.

20

The light guide comprises a tube with substantially reflective walls. Preferably the tube has a constant cross section which is conveniently a regular polygon. Having a regular cross section means that the array of images of the light source will also be regular which is advantageous for proximity sensing. A square section tube is most preferred.

25

The tube may comprise a hollow tube having reflective internal surfaces, i.e. mirrored internal walls. Alternatively the tube may be fabricated from a solid material and arranged such that a substantial amount of light incident at an interface between the material of the tube and surrounding material undergoes total internal reflection. The tube material may be either coated in a coating with a suitable refractive index or designed to operate in air, in which case the refractive index of the light guide material should be such that total internal reflection occurs at the material air interface.

30



- Using a tube like this as a light guide results in multiple images of the light source being generated which can be projected to the scene. The light guide is easy to manufacture and assemble and couples the majority of the light from the source to the scene. Thus low power sources such as light emitting diodes can be used. As the exit aperture can be small the apparatus also has a large depth of field which makes it useful for ranging applications which require spots projected that are separated over a wide range of distances.
- 10 The projection optics may comprise a projection lens. The projection lens may be located adjacent the output face of the light guide. In some embodiments where the light guide is solid the lens may be integral to the light guide, i.e. the tube may be shaped at the output face to form a lens.

The invention will now be described by way of example only with reference to the following drawings of which;

5 Figure 1 shows an embodiment of the present invention,

Figure 2 shows a suitable spot projector for use in the present invention,

Figure 3 illustrates the principle of operation of the spot projector shown in figure 2,

10

Figure 4 shows an array of spots projected by a spot projector and a suitable mask for use in the invention,

15 Figure 5 shows a mask useful for another embodiment of the invention and illustrates how the invention can be used to give indications that an object is within distinct range bands.

20 Figure 1 shows an embodiment of the invention according to the present invention used as a simple proximity sensor. A spot projector 2 projects an array of spots onto a scene. Lens 4 collects light reflected from the scene and focusses it, through mask 6 onto the detector 8. The detector 8 is connected to thresholding circuitry 10 which controls alarm 12.

25 As can be seen light projected from the spot projector 2 is effectively an array of beams of light with a certain angular separation. If only a distant object 14 is located in the scene the light reflected from the object 14 falls upon a non transmissive portion of the mask. Detector 8 therefore receives no light and thresholding circuitry 10 therefore measures an intensity level less than the predetermined threshold.

30

However when a closer object 16 is introduced into the scene light reflected from this object is transmitted through mask 6 to detector 8. The measured intensity therefore exceeds the threshold level and thresholding circuitry 10 activates alarm 12 to indicate that an object has come within a certain distance.

The invention relies on a parallax type effect and appropriate arrangement of the spot projector, detector and mask. As can be seen from figure 1 the angle from the detector to a spot in the scene varies according to the distance to the object in the scene. Were the mask not present the detector would see the spots at different positions depending on the proximity of the object. The mask therefore blocks reflected light from the scene from reaching the detector unless there is a close object in the field of view. This type of proximity sensor therefore gives a simple alarm to indicate an object has approached within a certain minimum distance. Such a proximity sensor could be useful say in applications such as detecting obscuration of a thermal detector.

Thermal detectors such as the single element pyroelectric detector, often referred to as a passive infrared (PIR) sensor, are used in a variety of application such as intruder alarms, fire alarms or automatic lighting. PIR sensors are designed to give a response to the thermal signature of a moving body or bodies within a certain field of view. Typically the sensitivity and field of view of such sensors is designed for a specific application. For example, intruder alarms or automated lighting systems are generally designed to be triggered by movement of a human body.

PIR sensors are vulnerable to being obscured or masked however. Such masking could be deliberate, for instance by covering the sensor with an infrared opaque material or spraying the window with such a material and could be done covertly. The only way to test whether a sensor is working or not is to try to trigger a response, say by walking around the room. This needs positive action to test however and depending on the sensitivity of the sensor may not be possible. For instance a sensor could be designed to detect fires but ignore human movement and would therefore require an intense IR source to test the function. The sensor may also be obscured unintentionally, for instance by moving furniture or other material into the field of view.

The proximity sensor of the present invention could be employed on a PIR sensor to generate an alarm if anything comes within a predetermined distance of the sensor. This could be used as an indication that the sensor is obscured.

The nature of the array of spots projected by the spot projector 2 may vary depending upon the application. For some applications a linear array of spots may be required or a small two dimensional array may be used where the proximity sensor is designed to work with a narrow field of view.

Where the proximity sensor is designed to work over a larger field of view however a relatively large regular array of spots is preferred. One particularly suitable spot projector for projecting such an array of spots is shown in Figure 2.

A light source 24 is located adjacent an input face of a kaleidoscope 26. At the other end is located a simple projection lens 28. The projection lens is shown spaced from the kaleidoscope for the purposes of clarity but would generally be located adjacent the output face of the kaleidoscope.

The light source 24 is an infrared emitting light emitting diode (LED). Infrared is useful as the array of projected spots need not interfere with a visual image being acquired and infrared LEDs and detectors are reasonably inexpensive. However the skilled person would appreciate that other wavelengths and other light sources could be used for other applications without departing from the spirit of the invention.

The kaleidoscope is a hollow tube with internally reflective walls. The kaleidoscope could be made from any material with suitable rigidity and the internal walls coated with suitable dielectric coatings. However the skilled person would appreciate that the kaleidoscope could comprise a solid bar. Any material which is transparent at the wavelength of operation of the LED would suffice, such as clear optical glass. The material would need to be arranged such that at the interface between the kaleidoscope and the surrounding air the light is totally internally reflected within the kaleidoscope. Where high projection angles are required this could require the kaleidoscope material to be clad in a reflective material. An ideal kaleidoscope would have perfectly rectilinear walls with 100% reflectivity. It should be noted that a hollow kaleidoscope may not have an input or output face as such but the entrance and exit to the hollow kaleidoscope should be regarded as the face for the purposes of this specification.

- The effect of the kaleidoscope tube is such that multiple images of the LED can be seen at the output end of the kaleidoscope. The principle is illustrated with reference to figure 3. Light from the LED 24 may be transmitted directly along the
- 5 kaleidoscope undergoing no reflection at all – path 30. Some light however will be reflected once and will follow path 32. Viewed from the end of the kaleidoscope this will result in a virtual source 34 being seen. Light undergoing two reflections would travel along path 36 resulting in another virtual source 38 being observed.
- 10 The dimensions of the device are tailored for the intended application. Imagine that the LED 24 emits light into a cone with a full angle of  $90^\circ$ . The number of spots viewed on either side of the centre, unreflected, spot will be equal to the kaleidoscope length divided by its width. The ratio of spot separation to spot size is determined by the ratio of kaleidoscope width to LED size. Thus a  $200\mu\text{m}$  wide LED and a
- 15 kaleidoscope 30mm long by 1mm square will produce a square grid of 61 spots on a side separated by five times their width (when focussed).

- Projection lens 28 is a simple singlet lens arranged at the end of kaleidoscope and is chosen so as to project the array of images of the LED 24 onto the scene. The
- 20 projection geometry again can be chosen according to the application and the depth of field required but a simple geometry is to place the array of spots at or close to the focal plane of the lens.

- As mentioned the resulting projected array will therefore be a square grid of spots.
- 25 Figure 4a shows part of a scene as it appears to the detector when the target is a flat surface. The array is an x-y square grid of spots 40. Referring back to figure 1 it can be seen that the apparent position in the detected scene of any projected spot varies with range to the target. If the detector and the spot projector are located in the x-z plane there is no separation in the y direction and therefore the apparent motion of the
- 30 spot in the scene as the range is varied will be in a direction parallel to the x-direction as illustrated by arrow 42.

A suitable mask is therefore shown in Figure 4b. This mask is a sheet 44 of material which is opaque at the wavelength of interest. The sheet is provided with a series of

apertures 46. The apertures are arranged in a square grid and are sized and spaced so that at the operating distance in front of the detector a spot at the predetermined range could be seen through each aperture. The mask is located at the operating distance in front of the detector and is arranged such that when a target is below a certain range a spot is visible through the aperture, as indicated by spot 48. However as the target is moved away from the apparatus each spot appears to move in the scene in the direction indicated by arrow 50 until it is in a position 52 where it is no longer visible through the aperture and is blocked by the opaque material.

10 This mask can therefore be used with a sensor which either detects when an object has approached within a certain distance of the sensor – as indicated by an increase in the light intensity as the spots are brought into view – or when an object has moved more than a certain distance away – as indicated when the spots move out of view and the intensity drops.

15 Having most of the mask opaque cuts down on the amount of ambient light falling on the detector which helps discrimination and reduces the sensitivity required by the detector. However the mask could be mainly transparent with opaque parts if required. Also the apertures in an opaque mask could be covered with a transparent material to help protect the detector.

20 The detector 8 may be a simple intensity detector integrating the received intensity across its whole area or could comprise an array of detector elements.

25 The threshold level of intensity increase could be reasonably large such that the majority of the projected spots in the projected array must be visible to the detector before an alarm is raised. This would be useful where it is expected that an intruding object would in effect fill the whole field of view. However if an object was expected to fill only part of the scene only some of the projected spots would be visible to the detector. Thus the threshold level will be set according to the particular application as

30 would be understood by one skilled in the art.

A mask that allows discrimination between several groups of ranges is shown in figure 5. The mask is again a sheet of opaque material 44 having an array of apertures

10

therein. Four apertures 56a - d are shown for clarity although in reality the mask may be made up of repeating groups of these apertures. The apertures are again sized and shaped so that each aperture could show a spot reflected from a target at a predetermined range. However the apertures are differently sized and are extended by  
5 different amounts in the direction of apparent movement of the spots in the scene with varying range. Figures 5a to 5e show the positions of four spots 58 a - d in the projected array reflected from a target at progressively closer range.

In Figure 5a the target is far away and none of the spots 58 a - d are visible through  
10 the apertures. If the target moves closer however spot 58a becomes visible through aperture 56a. None of the other spots 58 b - d are visible through the other apertures however. In Figure 5c the target has moved closer still and now spots 58a and 58b are visible through their respective apertures 56a and 56b but the other two spots are not yet visible. Figures 5d and 5e shows that as the target moves closer still spots 58c  
15 becomes visible followed by spot 58d.

It can therefore be seen that the detector will see five distinct intensity levels as a target moves closer corresponding to no spots being visible or one, two, three or four spots being visible. Therefore the different intensity levels could be used to give an  
20 indication that a target is within a certain range boundary. Note that this embodiment, using a discriminating threshold level to determine the range, will only generally be appropriate where the targets are known to be of standard reflectivity and will fill the entire field of view at all ranges. If targets were different sizes a small target may generate a different intensity to a larger target and a more reflective target would  
25 generate a greater intensity than a less reflective one.

Where target consistency is not known several detectors could be used, each having a mask arranged so as to pass light reflected or scattered from spots at different ranges, i.e. each detector would have a single comparison to determine whether an object was  
30 within a certain range but the range for each detector could be different.

Alternatively the embodiment described with reference to figure 5 could be used with a means of determining which spots contribute to the overall intensity on the detector. This could be achieved by modulating the spots present in the scene. For instance

## 11

imagine each of the four spots in figures 5a – e was transmitted at a different modulated frequency. The signal from the detector 8 would then have up to four different frequency components. The detected signal could then be processed in turn for each frequency component to determine whether there is any signal through the corresponding family of apertures. In other words if spot 58a were modulated at frequency  $f_1$  identification of a signal component in the detected signal at  $f_1$  would indicate that a target was close enough that a spot appeared in aperture 56a. Absence of frequency component  $f_2$  corresponding to spot 58b would mean that the situation shown in figure 5b applied. Thus could be detected irrespective of whether an object is large or small or reflective or not as it is the detection of the relevant frequency component which is indicative of range.

Using a spot projector as shown in figure 2 to produce such a modulated output would simply involve replacing the single LED 24 with a row of 4 LEDs each modulated at a different frequency. Modulating the frequency in this way thus allows incremental range discrimination but reduces the density of coverage to the scene as each spot can only be used for one of the possible ranges.

Imagine that an arrangement like this is used as a proximity sensor for a vehicle to aid reversing. When the vehicle starts reversing there is no target nearby and so the situation is that shown in figure 5a, no spots in view. As reversing continues the vehicle could start to approach an object such as another vehicle or a wall. Within a certain range spot 58a enters the field of view through aperture 56a. This causes a certain increase in the intensity level which prompts an audible alarm, say a beep repeating at a certain frequency. As the vehicle keeps reversing another spot, spot 58b becomes visible to the detector and so there is another jump in intensity. The apparatus may then increase the frequency at which the audible beep is repeated. Another increase in intensity by spot 58c coming into view would prompt another increase in frequency and finally if spot 58d also came into view the audible alarm could become constant. The apparatus could be arranged such that the first spot 58a comes into view at a range of a tens of centimetres whereas the last spot 58d comes into view at a range of just a few centimetres.



## 12

As mentioned each spot will appear to move in the detected scene as the range to the target from which it is reflected is varied. Each spot could therefore be said to have a locus of apparent movement in the scene with varying range. If the locus of apparent movement of two spots were to overlap it is possible that not only would a projected spot be visible through an aperture at a first distance and disappears from view as the range to the target is increased as desired, but another spot may start to become visible through that aperture as the range is increased. This could obviously lead to false positives being recorded. The degree of apparent motion of a spot in the scene depends upon the baseline or separation of the spot projector and the detector and therefore a small baseline leads to a low apparent motion of a spot in the scene. However a certain degree of apparent movement is required for the apparatus to function appropriately.

The spacing of spots in the projected array is another factor that can be controlled to reduce the possibility of overlap. Also the projected array can be arranged relative to the detector and spot projector so as to ensure that the position of adjacent spots could not overlap at all. The direction of apparent motion of the spots in the array will be parallel to the axis of separation of the detector and the projector. If the array is tilted with respect to the axis of separation the possibility of overlap is reduced -- in effect if the array projected is an x-y grid the detector and projector are separated in both the x and y directions.

**CLAIMS**

1. A proximity sensor comprising an illumination means for illuminating a scene with an array of spots of light, a detector arranged to receive light reflected from the scene and a mask, located in the optical path of light from the scene to the detector, the mask having transmissive portions and non-transmissive portions and being arranged, together with the illumination means and detector such that, in use, light reflected from a target from within a first range of distances from the sensor is transmitted through the mask to the detector and light from a second range of distances is not transmitted through the mask.
2. A proximity sensor as claimed in claim 1 wherein the mask is arranged such that reflected light is transmitted to the detector if the target is within a predetermined distance of the sensor and reflected light is not transmitted if the target is outside of that predetermined distance.
3. A proximity sensor as claimed in claim 1 wherein the mask is adapted to transmit light reflected from a target more than a predetermined distance away from the sensor and not transmit light from within the predetermined distance.
4. A proximity sensor as claimed in any preceding claim wherein the illumination means illuminates the scene with spots of infrared light.
5. A proximity sensor as claimed in any preceding claim wherein the illumination means is modulated at a predetermined frequency and a filter is applied to the detector at the predetermined frequency.
6. A proximity sensor as claimed in any preceding claim wherein the detector is adapted to receive ambient light from the scene and compensate for the effects of the ambient light.

14

7. A proximity sensor as claimed in any preceding claim wherein the mask is adapted to define a plurality of ranges of distance from the sensor and transmit a different amount of reflected light from a target in each distance range.
8. A proximity sensor as claimed in claim 7 wherein the illumination means is adapted to project a plurality of spots at different modulated frequencies and the mask is adapted such that at each range of distance a different modulated frequency is transmitted to the detector.
9. A proximity sensor as claimed in any preceding claim wherein the mask comprises a substantially non transmitting material having a plurality of transmissive windows.
10. A proximity sensor as claimed in any preceding claim wherein the illumination means comprises a light source arranged to illuminate part of the input face of a light guide, the light guide comprising a tube having substantially reflective sides and being arranged together with projection optics so as to project an array of distinct images of the light source towards the scene.
11. A proximity sensor as claimed in claim 10 wherein the light guide comprises a tube with a square cross section.
12. A proximity sensor as claimed in claim 10 or claim 11 wherein the tube comprises a hollow tube having reflective internal surfaces.
13. A proximity sensor as claimed in claim 10 or claim 11 wherein the tube comprises a solid material, arranged such that a substantial amount of light incident at an interface between the material of the tube and surrounding material undergoes total internal reflection.
14. A proximity sensor as claimed in any of claims 10 to 13 wherein the light source comprises an LED.

15

15. A proximity sensor as claimed in any of claims 10 to 13 wherein the light source comprises an array of LEDs.

16

**ABSTRACT****Proximity Sensor**

This invention relates to a proximity sensor. An illumination means (2) projects an array of spots (40) towards a scene. Detector (8) looks towards the scene through a mask (6). The mask (6) is arranged such that light from a target at a certain range, for instance far object (14) is not transmitted to the detector. Light reflected from a close object (16) however passes through the mask (6) and is incident on the detector (8). A rise in the intensity of incident light at the detector (8) is determined by threshold detector 10 and used to operate an alarm (12).

Figure 1 should accompany the abstract.

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**